


# Style 8420 Split

## Easy installation and removal

- Split design eliminates equipment disassembly, reducing costly downtime
- Available in EPDM, nitrile\* and fluoroelastomer in sizes from 2" to 24" standard. Contact Garlock for larger sizes
- Can be customized for your application; contact Garlock with your specifications
- Adhesive kits with installation instructions are provided with every shipment to facilitate quick assembly, clamps not included

\* EPDM and nitrile are standard—  
other elastomers available on request.

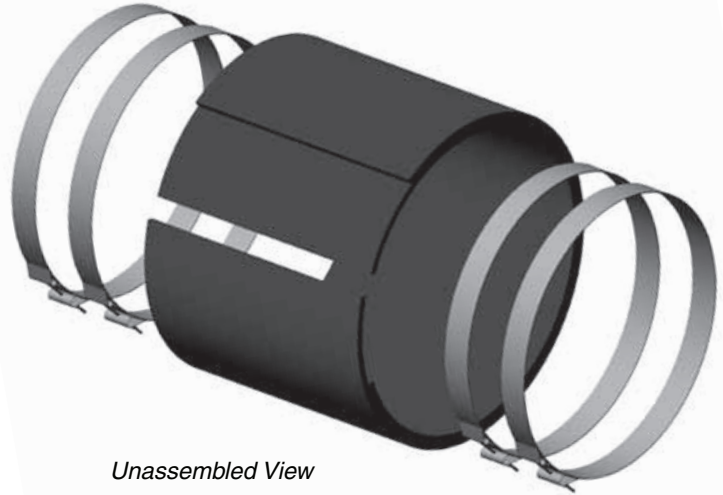

Unassembled View

## Specifications

	2" Max. Pipe Gap Opening	4" Max. Pipe Gap Opening	6" Max. Pipe Gap Opening
<b>Clamps Required:</b>	4	4	4
<b>Thickness:</b>			
2"-12" Size (50.8 mm-304.8 mm)	1/4" (6.4 mm)	1/4" (6.4 mm)	1/4" (6.4 mm)
14"-24" Size (355.6 mm-609.6 mm)	3/8" (9.5 mm)	3/8" (9.5 mm)	3/8" (9.5 mm)
<b>Pressure, Max.:</b>	15 psi (1.034 bar)	5 psi (0.345 bar)	5 psi (0.345 bar)
<b>Vacuum:</b>	14" Hg (356 mm Hg)	5" Hg (127 mm Hg)	5" Hg (127 mm Hg)
<b>Temperature, Max.</b>			
with standard adhesive kit	165°F (74°C)	165°F (74°C)	165°F (74°C)
with Viton* adhesive	400°F (204°C)	400°F (204°C)	400°F (204°C)
<b>Movement:</b>	Vibration Only	Vibration Only	Vibration Only
<b>Lateral Misalignment, Max.:</b>	1/2" (12.7 mm)	1/2" (12.7 mm)	1/2" (12.7 mm)
<b>Width of Joint:</b>	8" (203.2 mm)	10" (254 mm)	12" (304.8 mm)

### Notes:

1. All applications above 165°F (74°C) require Viton\* adhesive kits.
2. T-bolt clamps recommended on all applications; not included with adhesive kits.

\* Viton is a registered trademark of DuPont Dow Elastomers.